

## THE EFFECT OF TEMPERATURE ON REFRACTIVE INDEX OF CARBON DISULFIDE

Nguyen Tien Dung<sup>1,\*</sup>, Nguyen Thi Thu Tram<sup>3</sup>, Le Van Thanh<sup>4</sup>,  
Truong Minh Vu<sup>5</sup>, Le Canh Trung<sup>2</sup>

<sup>1</sup> School of Engineering and Technology, Vinh University, Vietnam

<sup>2</sup> Faculty of physics, College of Education, Vinh University, Vietnam

<sup>3</sup> Nguyen Thai Binh High School, Tay Ninh, Vietnam

<sup>4</sup> Loc Thai High School, Binh Phuoc, Vietnam

<sup>5</sup> Phan Chu Trinh High School, Binh Thuan, Vietnam

### ARTICLE INFORMATION ABSTRACT

**Journal:** Vinh University  
Journal of Sciences

**ISSN:** 1859-2228

**Volume:** 52

**Issue:** 1B

**\*Correspondance:**  
anhieu.medical@gmail.com

**Received:** 27 October 2022

**Accepted:** 03 Febuary 2023

**Published:** 20 March 2023

In this paper, the effect of temperature on the refractive index of Carbon disulfide liquid based on the influence of temperature on the Sellmeier coefficient has been presented. The effect of temperature on the liquid refractive index of Carbon disulfide in the visible and infrared regions according to the expression of M. Chemnitz was also investigated. From the survey results, it is concluded that as the wavelength increases, the refractive index of Carbon disulfide decreases, but when the temperature is increased then the refractive index of Carbon disulfide decreases faster.

**Keywords:** Refractive index; Carbon disulfide; thermo-optics.

### 1. Introduction

**Citation:**  
Nguyen Tien Dung et al.  
(2023). The effect of  
temperature on refractive index  
of Carbon disulfide. **Vinh Uni.  
J. Sci.** Vol. 52 (1B), pp. 27-34  
doi: 10.56824/vujs.2022nt26

Nowadays, photonic crystal fibers are often applied in supercontinuous source sources [1]-[3]. With the flexibility to change the structure parameter, the photonic fiber allows to optimize the dispersion curve for supercontinuous. A new and topical approach is to use temperature to change the properties of optical fibers for supercontinuous [1]-[2], [4]-[5]. Specifically, the adjustment of the dispersion curve is made possible based on the thermo-optics of the optical fiber, the properties of the fiber material, such as the refractive index, which can be adjusted by changing the environment temperature.

### OPEN ACCESS

Copyright © 2023. This is an Open Access article distributed under the terms of the [Creative Commons Attribution License \(CC BY NC\)](#), which permits non-commercially to share (copy and redistribute the material in any medium) or adapt (remix, transform, and build upon the material), provided the original work is properly cited.

Carbon disulfide (CS<sub>2</sub>) is used as a nonlinear optical medium due to its large third-order nonlinear refraction, the subject of numerous experimental studies using time-resolving techniques such as the Kerr effect, nonlinear interference measurements, such as frequency domain light scattering, third harmonic generation and Z-scan and four-wave mixing. CS<sub>2</sub> is used in a wide range of applications as nonlinear optical fluids including liquid core optical fibers for nonlinear photonic applications, super controllability generation, slow light, ultrafast time image resolution, soliton propagation and all-optical switching, etc.

The papers [1]-[2] have measured the photothermal and photobarometric parameters of Carbon disulfide over a spectrum extending from the visible to the near-infrared region. A theoretical model was used to establish a temperature-dependent refractive index model for Carbon disulfide with temperature-dependent Sellmeier coefficients [6]-[9]. From there, the influence of temperature on coefficient and refractive index can be investigated by Maple software. With a topical new approach is to change the temperature to change the properties of the optical fiber for supercontinuous. In particular, the adjustment of the dispersion curve is made possible thanks to the thermo-optics of the optical fiber and the properties of the fiber material, such as the variable refractive index by varying the ambient temperature [1]-[2].

Therefore, the study of the effect of temperature on the liquid refractive index of Carbon disulfide is necessary, topical, scientific and practical.

## **2. Some theoretical models of liquid refractive index**

From different refractive index at different wavelengths, one can calculate a dispersion equation by fitting a nonlinear curve using the least squares method. Among the different dispersion equations, the Sellmeier and Cauchy formulas are the most popular [8]-[10]. The Sellmeier equation can be used in the entire spectral region and is subject to the second order:

$$n^2(\lambda) = 1 + \frac{A_1\lambda^2}{\lambda^2 - B_1} + \frac{A_2\lambda^2}{\lambda^2 - B_2}, \quad (1)$$

with  $A_1, A_2$  are the material parameters;  $\sqrt{B_1}$  and  $\sqrt{B_2}$  are the wavelengths of the absorption bands, respectively.

Far from any resonance one can use the simpler Cauchy equation. Thus, the first-order Sellmeier equation can be extended to a power series:

$$n^2(\lambda) = 1 + \frac{A_1\lambda^2}{\lambda^2 - B_1} \approx 1 + A_1 \left( 1 + \frac{B_1}{\lambda^2} + \frac{B_1^2}{\lambda^4} \right) = C_0 + \frac{C_1}{\lambda^2} + \frac{C_2}{\lambda^4}. \quad (2)$$

An improvement in refractive index correction of liquids in the visible to near-infrared regions can be expected if the  $C_3\lambda^2$  term in equation (2) is added due to the infrared oscillating absorption bands [8] lead to:

$$n^2(\lambda) = C_0 + \frac{C_1}{\lambda^2} + \frac{C_2}{\lambda^4} + C_3\lambda^2. \quad (3)$$

For each liquid, the constants of the Sellmeier and Cauchy formulas are calculated.

## **3. Investigate the effect of temperature on liquid refractive index of CS<sub>2</sub>**

### **3.1. Effect of temperature on the liquid Sellmeier coefficient of CS<sub>2</sub>**

The near-infrared spectrum of Carbon disulfide  $n_0(\lambda_k)$  was taken using a known Sellmeier model at wavelength  $\lambda_k$  where the photothermal parameter is known and

assume that the pressure does not change. New values of the near infrared spectrum for the selected temperature  $T_1$  were calculated using the linear thermal-optics relationship according to the following:

$$n(\lambda_k, T_1) = n_0(\lambda_k) + \left. \frac{dn}{dT} \right|_{T_0} (\lambda_k) \cdot (T_1 - T_0) \tag{4}$$

where  $T_0 = 293$  K is room temperature.

Adjust the wavelength dependence of all  $n(\lambda_k, T_1)$  with a new Sellmeier equation. The final expression for the pressure and temperature-dependent near-infrared scattering of Carbon disulfide yields the following Sellmeier thermodynamic equation:

$$n(\lambda, T) = \left( 1 + \frac{B_1(T)\lambda^2}{\lambda^2 - C_1^2(T)} + \frac{B_2\lambda^2}{\lambda^2 - C_2^2} \right)^{1/2} \tag{5}$$

The Sellmeier coefficients obtained in Tables 1 and 2 allow us to accurately describe the effects of temperature and pressure on the near-infrared dispersion of Carbon disulfide from violet to near-infrared light wavelengths.


**Table 1:** Sellmeier coefficient of Carbon disulfide [8]

TT	Sellmeier coefficient	Calculation expression (T(K), $T_0 = 293$ K)
1	$B_1(T[K])$	$2.17144765 - 0.66589562(T/T_0)$
2	$B_2$	0.085924705
3	$C_1(T[K])$ ( $\mu\text{m}$ )	$0.18382049 - 0.00505833(T/T_0) - 0.00421529(T/T_0)^2$
4	$C_2$ ( $\mu\text{m}$ )	6.48315928

**Table 2:** Sellmeier coefficient of Carbon disulfide at various temperatures

T	B1	B2	C1	C2
318.15	1.44876407	0.085924705	0.173365871	6.48315928
313.15	1.460121662	0.085924705	0.173606976	6.48315928
308.15	1.471479254	0.085924705	0.173845628	6.48315928
303.15	1.482836846	0.085924705	0.174081828	6.48315928
298.15	1.494194438	0.085924705	0.174315575	6.48315928
293.15	1.50555203	0.085924705	0.174546870	6.48315928
288.15	1.516909622	0.085924705	0.174775712	6.48315928
283.15	1.528267214	0.085924705	0.175002102	6.48315928
278.15	1.539624806	0.085924705	0.175226039	6.48315928
273.15	1.550982398	0.085924705	0.175447523	6.48315928
268.15	1.56233999	0.085924705	0.175666555	6.48315928
263.15	1.573697582	0.085924705	0.175883134	6.48315928


The dependence of the coefficients  $B_1$  and  $C_1$  on temperature is plotted in Figure 1.

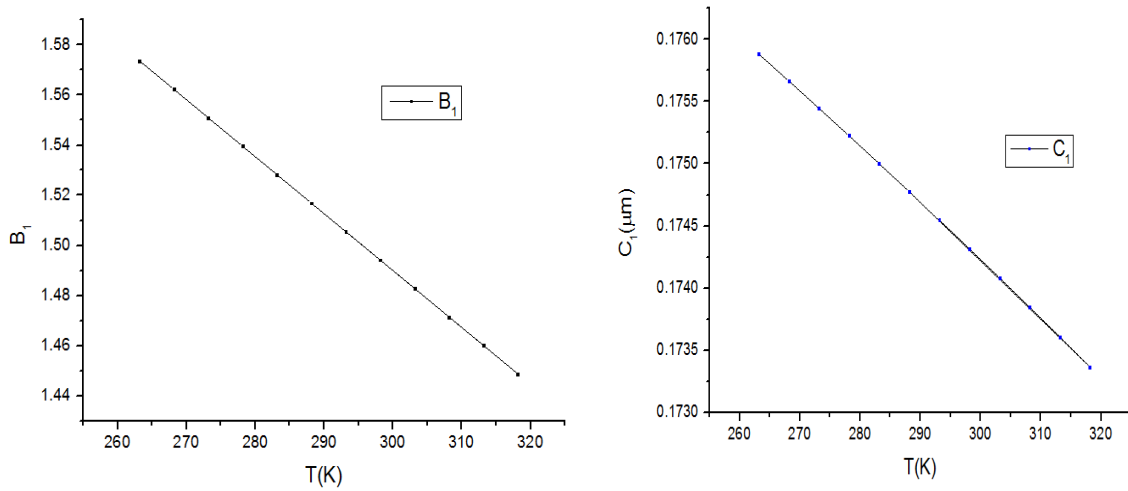

**Figure 1:** The dependence of the coefficient  $B_1$ ,  $C_1$  on the ambient on temperature


**3.2. Investigate the effect of temperature on CS<sub>2</sub> liquid extraction in the visible and near-infrared light regions**

The refractive index dependence of the CS<sub>2</sub> liquid according to the expression in the work [8] of M. Chemnitz in the visible and near-infrared light regions at 20<sup>0</sup>C and 45<sup>0</sup>C are plotted in Figure 2 for a comparison of the thermal changes leading to the change in refractive index.

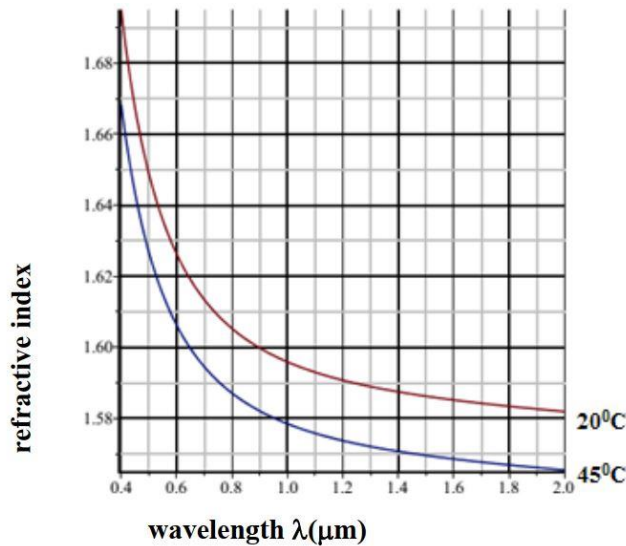

**Figure 2:** The refractive index of CS<sub>2</sub> in the visible and near infrared regions at 20<sup>0</sup>C and 45<sup>0</sup>C


Looking at the graph, as the wavelength increases, the refractive index of CS<sub>2</sub> decreases, but as the temperature increases, the refractive index of Carbon disulfide decreases faster. To clearly see the influence of temperature, the dependence of CS<sub>2</sub> refractive index in the visible and near-infrared light domains at -100<sup>0</sup>C, 50<sup>0</sup>C, 250<sup>0</sup>C and 450<sup>0</sup>C were further investigated as shown in Figure 3.

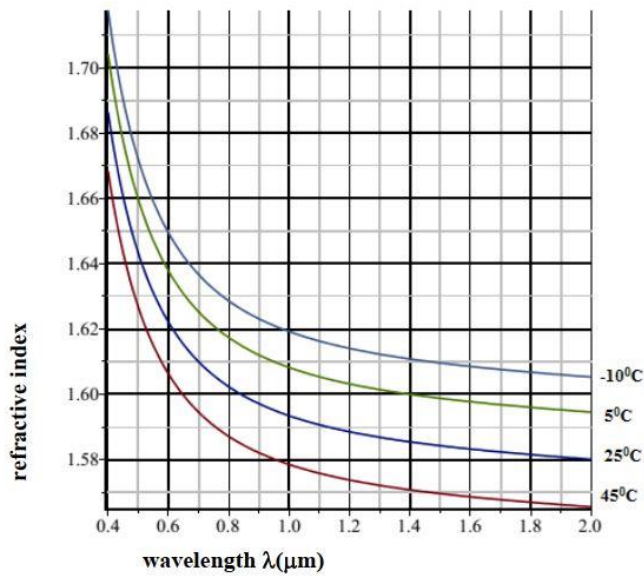

**Figure 3:** The refractive index of CS<sub>2</sub> in the visible and near-infrared regions at -10<sup>0</sup>C, 5<sup>0</sup>C, 25<sup>0</sup>C and 45<sup>0</sup>C

**3.3. Investigation of the effect of temperature on the refractive index of liquid CS<sub>2</sub> according to the results of M. Chemnitz**


The refractive index of the liquid Carbon disulfide according to the expression in the work [8] of M. Chemnitz in the wavelength region of 0.3 μm to 12 μm near the temperature of 20<sup>0</sup>C and 45<sup>0</sup>C is plotted in Figure 4.

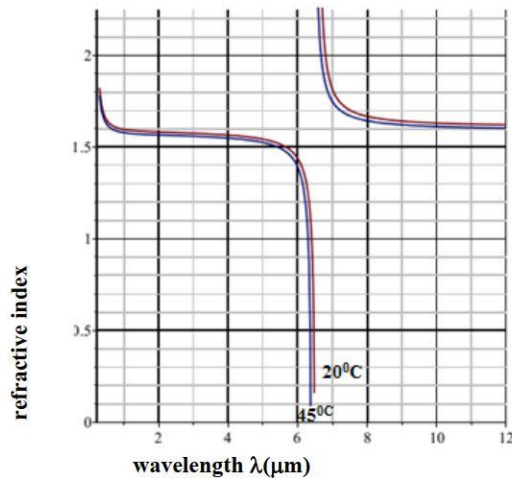

**Figure 4:** The refractive index of CS<sub>2</sub> in the visible and near-infrared regions at 20<sup>0</sup>C and 45<sup>0</sup>C

Looking at the graph in Figure 5, the refractive index of CS<sub>2</sub> in the long infrared region. We change the temperature -10<sup>0</sup>C, 5<sup>0</sup>C, 25<sup>0</sup>C and 45<sup>0</sup>C to clearly see the effect of temperature on CS<sub>2</sub> refractive index. As the temperature increases, the refractive index of CS<sub>2</sub> decreases faster. These results can be explained as follows: here is the liquid

environment, so when the temperature increases, the density of matter decreases (the density decreases). Under normal conditions, the refractive index of the material medium decreases. as the density of matter decreases.

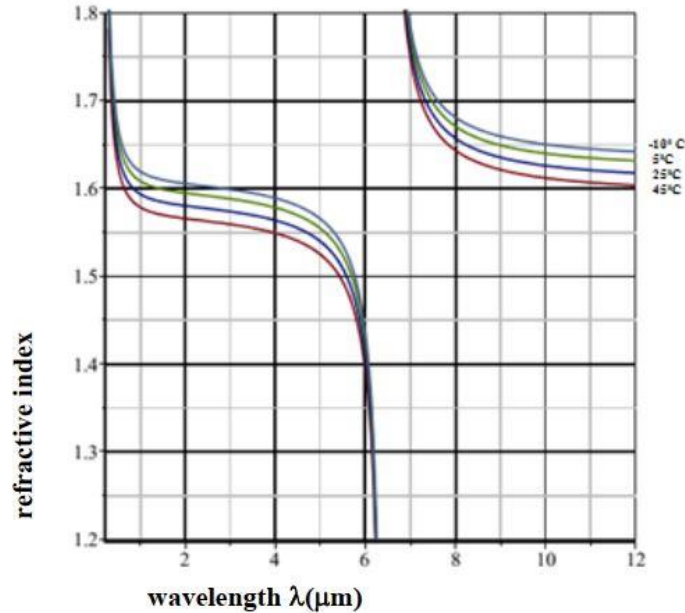

**Figure 5:** The refractive index of  $\text{CS}_2$  in the visible and near-infrared regions at  $-10^\circ\text{C}$ ,  $5^\circ\text{C}$ ,  $25^\circ\text{C}$  and  $45^\circ\text{C}$

With the direction of changing the temperature to change the refractive index  $\text{CS}_2$  in the visible and near-infrared light regions, if the pump  $\text{CS}_2$  liquid was used for the crystal optical fiber core, one can simulate and experimentally study the influence of temperature effect on supercontinuity. Specifically, the dispersion curve is changed because the refractive index can be changed by changing the ambient temperature, from which the optimal temperature conditions for supercontinuous emission can be determined or the direction of temperature sensor research can be opened, etc.

#### 4. Conclusions

In this paper, the refractive index expression of the temperature-dependent Carbon disulfide liquid according to the Sellmeier model with the temperature-dependent Sellmeier coefficients was determined. The results of the investigation of the influence of temperature on the Sellmeier coefficient are shown in Table 2 and Figure 1. The influence of temperature on the liquid refractive index of Carbon disulfide in the visible and visible light domain were also investigated. Infrared close to the following temperatures:  $-10^\circ\text{C}$ ,  $5^\circ\text{C}$ ,  $25^\circ\text{C}$  and  $45^\circ\text{C}$ . The survey results show that the refractive index of Carbon disulfide decreases faster with increasing temperature and is the basis for opening a direction to study the influence of temperature on the supercontinuity of crystalline optical fibers with liquid-injected cores by Carbon disulfide liquid.

---

**REFERENCES**

- [1] J. M. Dudley and J. R. Taylor, *Supercontinuum Generation in Optical Fibers*, Cambridge University Press, 2010.
- [2] A. M. Heidt, J. S. Feehan, J. H. V. Price, and T. Feurer, "Limits of coherent supercontinuum generation in normal dispersion fibers," *Journal of the Optical Society of America B* 34, pp. 764-775, 2017.
- [3] Trung Le Canh, Hieu Le Van, Dariusz Pysz, Thuan Bui Dinh, Dung Tien Nguyen, Quang Ho Dinh, Mariusz Klimczak, Rafał Kasztelaniec, Jacek Pniewski, Ryszard Buczynski, Khoa Xuan Dinh, "Supercontinuum generation in all-normal dispersion suspended core fiber infiltrated with water," *Optical Materials Express*, pp. 1733-1748, 2020.
- [4] Nguyen Duy Cuong Le Canh Trung, Ho Dinh Quang, Dinh Xuan Khoa, Nguyen Van Phu, Nguyen Tien Dung, Trinh Ngoc Hoang, Bui Dinh Thuan, "Phase refractive index measurements of water by the interferometry of broad light source," *CASEAN-6 Proceedings*, pp. 226-271, 2019.
- [5] Dung Tien Nguyen, Nguyen Duy Cuong, Ho Dinh Quang, Dinh Xuan Khoa, Nguyen Van Phu, Chu Van Lanh, Nguyen Thanh Vinh, Bui Dinh Thuan, "Measuring the refractive index of a methanol-water mixture according to the wavelength", *Photonics Letters of Poland*, pp. 10-12, 2021.
- [6] A. Samoc, "Dispersion of refractive properties of solvents: Chloroform, toluene, benzene, and Carbon disulfide in ultraviolet, visible, and near-infrared," *J. Appl. Phys.* 94, pp. 6167-6174, 2003.
- [7] J. Rheims, J. K'oser, and T. Wriedt, "Refractive-index measurements in the near-IR using an Abbe refractometer," *Meas. Sci. Technol.* 8, pp. 601-605, 1997.
- [8] M. Chemnitz, M. Gebhardt, C. Gaida, F. Stutzki, J. Kobelke, J. Limpert, A. Tünnermann, M. A. Schmidt, "Hybrid soliton dynamics in liquid-core fibres", *Nat. Commun.* 8, pp. 42, 2017.
- [9] S. Ghosal, J. L. Ebert, and S. A. Self., "The infrared refractive indices of  $\text{CHBr}_3$ ,  $\text{CCl}_4$  and  $\text{CS}_2$ ", *IR Physics* 34, pp. 621-628, 1993.

## TÓM TẮT

### SỰ ẢNH HƯỞNG CỦA NHIỆT ĐỘ LÊN CHIẾT SUẤT CARBON DISULFIDE

**Nguyễn Tiến Dũng<sup>1</sup>, Nguyễn Thị Thu Trâm<sup>3</sup>, Lê Văn Thành<sup>4</sup>,  
Trương Minh Vũ<sup>5</sup>, Lê Cảnh Trung<sup>2</sup>**

<sup>1</sup> Viện Kỹ thuật và Công nghệ, Trường Đại học Vinh, Việt Nam

<sup>2</sup> Khoa Vật lý, Trường Sư phạm, Trường Đại học Vinh, Việt Nam

<sup>3</sup> Trường Trung học phổ thông Nguyễn Thái Bình, Tây Ninh, Việt Nam

<sup>4</sup> Trường Trung học phổ thông Lộc Thái, Bình Phước, Việt Nam

<sup>5</sup> Trường Trung học phổ thông Phan Chu Trinh, Bình Thuận, Việt Nam

Ngày nhận bài 27/12/2022, ngày nhận đăng 03/02/2023

Trong bài báo này, biểu thức chiết suất của chất lỏng Carbon disulfide phụ thuộc vào nhiệt độ theo mô hình Sellmeier với các hệ số Sellmeier phụ thuộc vào nhiệt độ đã được xác định. Kết quả khảo sát ảnh hưởng của nhiệt độ lên hệ số Sellmeier được thể hiện trong Bảng 2 và Đồ thị hình 1. Sự ảnh hưởng của nhiệt độ lên chiết suất chất lỏng Carbon disulfide trong miền ánh sáng nhìn thấy và hồng ngoại gần với các nhiệt độ: -10<sup>0</sup>C, 5<sup>0</sup>C, 25<sup>0</sup>C và 45<sup>0</sup>C cũng đã được khảo sát. Kết quả khảo sát cho thấy chiết suất Carbon disulfide giảm nhanh hơn khi nhiệt độ tăng và là cơ sở cho phép mở ra hướng nghiên cứu ảnh hưởng của nhiệt độ lên sự phát siêu liên tục của sợi quang tinh thể có lõi bơm chất lỏng Carbon disulfide.

**Từ khóa:** Chiết suất; Carbon disulfide; quang-nhiệt.